

JC14 Rec'd PCT/

07 JAN 2002

PCT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT application of:

Applicant(s): John David Schnabel et al.

Serial No: 09/869,618

Filed: June 29, 2001

Title: CABINET

Examiner:

Art Unit:

Docket Number: DYOUP0216US

SUBMISSION OF PRIORITY DOCUMENT(S)

Commissioner for Patents
United States Patent and Trademark Office
Washington, D.C. 20231

Dear Sir:

Regarding applicant's claim to convention priority, enclosed herewith is/are certified copy/copies of the following priority application(s):

GB9828841.8 dated December 30, 1998

Please acknowledge receipt of the enclosed priority document(s).

Respectfully submitted,

RENNER, OTTO, BOISSELLE & SKLAR

By 


Don W. Bulson, Reg. No. 28,192


1621 Euclid Avenue
Nineteenth Floor
Cleveland, Ohio 44115
(216) 621-1113

CERTIFICATE OF MAILING

I hereby certify that this correspondence (along with any paper referenced to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to Commissioner for Patents, United States Patent and Trademark Office, Washington, D.C. 20231.

Date: December 13, 2001


Shari Saus



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

I also certify that by virtue of an assignment registered under the Patents Act 1977, the application is now proceeding in the name as substituted.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

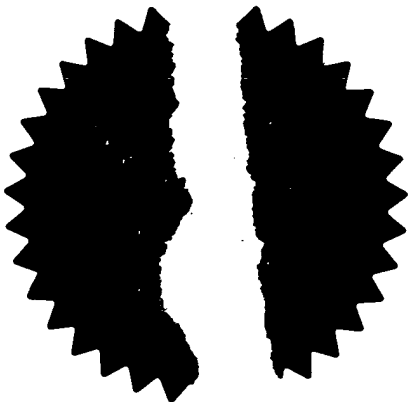

Signed

Andrew Gersay

Dated 10 July 2001



The
Patent
Office



INVESTOR IN PEOPLE

GB9828841.8

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

APW ELECTRONICS LIMITED
Electron Way
Chandlers Ford
EASTLEIGH
Hampshire
SO53 4ZR
United Kingdom
Incorporated in the United Kingdom



[ADP No. 07719974001].

Patents Form 1/77

Patents Act 1977
(Rule 16)

The
Patent
Office

310EC98 E415113-4 002246
P01/7700 0.00 - 9828841.8



Request for a grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	P006038GB		
2.	Patent application number (The Patent Office will fill in this part)	9828841.8		30 DEC 1998
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	VERBO ELECTRONICS LIMITED Electron Way Chandlers Ford Eastleigh Hampshire SO53 4ZR Patents ADP number (if you know it) 805515006 If the applicant is a corporate body, give the country/state of its incorporation United Kingdom		
4.	Title of the invention	CABINET		
5.	Name of your agent (if you have one)	D YOUNG & CO		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	21 NEW FETTER LANE LONDON EC4A 1DA		
	Patents ADP number (if you have one)	59006		
6.	If you are declaring priority from one or more earlier patent applications, give the country and date of filing of the or each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d)) Yes

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form None

Description 7

Claims(s) 0

Abstract 0

Drawing(s) 7

10. If you are also filing any of the following, state how many against each item.

Priority documents None

Translations of priority documents None

Statement of inventorship and right to grant of a patent (Patents Form 7/77) None

Request for preliminary examination and search (Patents Form 9/77) None

Request for substantive examination (Patents Form 10/77) None

Any other documents (please specify) None

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

D. Young Co.

30 12 98

D YOUNG & CO

Agents for the Applicants

12. Name and daytime telephone number of the person to contact in the United Kingdom W M C PURVIS 01703 634816

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505

b) Write your answers in capital letters using black ink or you may type them

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you answered 'Yes' Patents Form 7/77 will need to be filed.



e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 7/77

Patents Act 1977
(Rule 15)

The
Patent
Office



The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Statement of inventorship and of right to grant of a patent

1. Your reference	P006038GB MP	
2. Patent application number (if you know it)	9828841.8	
3. Full name of the or of each applicant	APW Electronics Limited	
4. Title of the invention	CABINET	
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By virtue of an Assignment dated 7 December 1999 between ourselves and the overnamed inventors	
6. How many, if any, additional Patents Forms 7/77 are attached to this form? (see note (c))	0	
7.	<p>I/We believe that the person(s) named over the page (and on any extra copies of this forms) is/are the inventor(s) of the invention which the above patent relates to</p> <p>Signature <u>D. Young</u> Date 24 12 99</p> <p>D YOUNG & CO Agents for the Applicants</p>	
8. Name and daytime telephone number of the person to contact in the United Kingdom	W M C PURVIS	023 8063 4816

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

SCHNABEL, John David

11a Berkeley Close
Hill Head
Fareham
Hampshire

(Formerly of 5 Sanross Close
Stubington
Fareham
Hampshire)

Patents ADP number (if you know it):

6653893002

PARKIN, John Richard

1 St Mary's Close
Brangore
Christchurch
Dorset
BH23 8HU

Patents ADP number (if you know it):

7568454001

Reminder

Have you signed the form?

Patents ADP number (if you know it):

DUPLICATE

CABINET

The invention relates to electrical cabinets.

Electrical cabinets are used for receiving electronic and electrical components particularly but not exclusively for the operation of local data networks. The components such as sub-racks with electronic and electrical components, fans and other accessories are mounted within the cabinet on internal frames and the cabinets generally have side panels, a door and end panels and are mounted on a frame which preferably comprises upper and lower end members and vertically extending side members preferably provided one towards the front and the other towards the rear at each lateral side of the cabinet.

According to one aspect of the invention, panel mounts, comprising members to extend vertically within the cabinet and having attachment means whereby panels can be mounted thereupon, are mounted to the side members of the cabinet by integral members which extend substantially parallel to the outer face of the panel mount at a spacing from the outer face and in a direction perpendicular to the longitudinal extent of the panel mount, such integral members each being engaged in a respective aperture in the side members or braces extending between the side members at one lateral side of the cabinet, followed by movement forwardly or rearwardly to secure the panel mount to the side members, retaining means such as a pin or stud then being inserted in aligned bores in the panel mounts and side members or braces to prevent return movement in said forward or rearward directions.

Such method of securement can have the advantage over previously proposed methods which involved vertical movement of the panel mounts to secure them, that panel mounts of the full height of the side members can be secured to the side members where previously, due to the vertical movement experienced during the engagement, it was necessary for the panel mount to be significantly shorter than the side member. The panel mounts, which generally define a 483 mm (19 inch) wide mounting, can thus be secured at various locations in the depth of the cabinet and can extend for the full height of the side members.

Preferably the apertures in the side members or braces are spaced at 25 mm horizontal spacing to set the locations at which the panel mounts can be secured at 25 mm spacings.

Advantageously the braces have horizontally elongate slots therein in addition
5 to the apertures whereby the braces can be secured by fastenings means, such as bolts, extending through the slots whereby the braces are horizontally movable with respect to the side members to permit the panel mounts to be secured at any desired location in the depth of the cabinet.

According to another aspect of the invention in an electrical cabinet chassis
10 supports, for example for supporting shelves, are provided in the form of cantilevers by providing the chassis supports with vertically spaced securing hooks which together are capable of preventing pivoting movement of a mounted article such as a shelf.

The vertically spaced hooks may project longitudinally of a wall of the chassis
15 support and parallel thereto to be engaged in respective apertures in a member from which they are to be supported.

According to a further aspect of the invention, means to secure in abutment
20 two rectangular section tubular metal members with their longitudinally axes mutually at right angles comprises punching or drilling at least two first holes in one wall of each of the metal members, acting through the first holes so formed to burst a respective second hole to each first hole in the opposite wall of the metal members to form an outwardly extending collar, screw threading the second holes in one of the members, engaging the collars of the other of the members in the first holes of said
25 one of the members and engaging a bolt through the aligned first and second holes of said one and said other members to engage the screw thread in the collar of said one of the members to clamp the members together.

According to a still further aspect of the invention, in an electrical cabinet a
method of hanging a vertical side panel comprising engaging a top flange of the side
30 panel, which top flange has a horizontal portion and a vertical return, over an upper suspension member of a frame of the cabinet and engaging a horizontal lower flange of the side panel with an upturned hook portion at the lower end of the frame of the

cabinet so that the upturned hook projects upwardly through an aperture in the horizontal lower flange.

Preferably the aperture in the horizontal lower flange is aligned with a cutout in a free edge of the flange and engagement is effected by engaging the hook in the cutout and then slightly raising the side panel while pushing it inwardly towards the cabinet before lowering the side panel downwardly onto the hook.

The upper suspension member of the frame may be provided at the upper end of vertical side members of the frame or may be provided on extension pieces which are supported by the vertical side members and project laterally outwardly to extend the width of the cabinet beyond the side members. By using such extension pieces extra wiring accommodating spaces can be provided at one or both of the sides of a cabinet.

The extension pieces can have hooks to engage over the upper edge of the side members, preferably in a recess so that such upper edges are below the upper extremity of the side members, and be bolted to the side members to retain them in position. Preferably each extension piece can be used as either an upper or a lower extension piece.

The invention is diagrammatically illustrated by way of example in the accompanying drawings, in which:-

Figure 1 is a perspective view of a panel mount with attachment means and a side member on which it can be mounted according to the invention;

Figure 1a is a sectional end view of the panel mount of Figure 1;

Figure 2 is an elevation of a brace to which the panel mount of Figure 1 can be secured;

Figure 3 is a perspective view of an inner face of a chassis support with cantilever engagement hooks;

Figure 4 is a view of the chassis support of Figure 3 from the other side;

Figure 5 is an exploded view showing components of an electrical cabinet;

Figure 6 is a view of the portion of Figure 5 indicated by the arrow VI but with a panel hung thereon;

Figure 7 is a sectional view through two of the components shown in Figure 6;

Figure 8 is a schematic view indicating hanging of a vertical side panel of an electrical cabinet by a method according to the invention;

Figure 9 is a sectional view taken on line IX-IX of Figure 8;

Figure 10 is a perspective view from above and an inner face of an extension member of an electrical cabinet according to the invention in a position to form an upper extension member;

Figure 11 is a view from the other side of the extension member of Figure 10 also orientated so as to form an upper member; and

Figure 12 is a view of the extension member shown in Figures 10 and 11 but in an orientation to form a lower extension member.

Referring to the drawings and firstly to Figures 1 and 2, a panel mount 1 is a generally angular section strip of metal and in one face has a three sided cutout 2 with the portion of the wall cut out, bent outwardly and bent back to form a tongue 3 which extends parallel to the wall in which the cutout 2 is formed. The tongue 3 can be inserted in any one of horizontally spaced apertures in a vertical side member 5 forming part of the frame of an electrical cabinet or can be inserted in any one of horizontally spaced apertures 6 in a brace 7 which can be secured to the side members of the frame of an electrical cabinet on one side of the cabinet to extend between a front side member and a rear side member. The apertures 4 or 6 are spaced at a pitch of 25 mm and thus the panel mount 1 can be supported on the side member 5 or the brace 7 by inserting the tongue 5 in an aperture 4 or 6 and then moving the panel mount 1 to cause the tongue 5 to move behind the web of the side member 5 or the brace 7 in which the aperture 4 or 6 is formed. The panel mount 1 does thus not need to be moved vertically to secure it and can be of the same length as the side members so as to extend completely between upper and lower frame members of the cabinet. A through aperture 8 may be provided in the panel mount 1 through which a pin or clip (not shown) can be inserted to engage in an aperture 9 provided alongside the aperture 4 or 6 in which the tongue 3 is engaged thereby to prevent return movement which would free the tongue from the aperture 4 or 6. Elongate slots 10 in the brace 7 can be used to secure the brace 7 by bolts to the side members, the length of the slots 10 allowing longitudinal shifting of the brace 7 with

respect to the side members to allow stepless positioning of the panel mounts with respect to the side members 5.

Referring to Figures 3 and 4, a chassis support 11 is shown which comprises upper and lower flanges 12 and 13 above and below a vertical web 14. In the web
 5 14 two cutouts 15 are formed by cutting around three sides and the member formed by each cutout is pressed out of the plane of the web 14 by a bend 16 and a further bend 17 and the tongue 18 which extends parallel to the web 14 but spaced therefrom is cut away to form upper and lower hooks 18, 19. By providing the two spaced
 10 hooks the chassis support 11 can be engaged in two vertically spaced apertures and then moved downwardly so that the chassis support 11 is cantilevered from a pair of the hooks 18, 19 and can resist tilting forces applied thereto. Although the chassis support 11 is shown as having two cutouts 15 and two pairs of hooks 18, 19 it is only envisaged that one or other of the pairs of hooks would be used at any one time but by providing two cutouts the chassis support 11 can act as a lefthanded chassis
 15 support or a righthanded chassis support. The chassis supports 11 are particularly suitable for supporting shelves in electrical cabinets.

Referring to Figure 5, an electrical cabinet 20, shown in exploded form, comprises an upper frame 21 and a lower frame 22 each formed by back-to-back U-shaped members 23 of tubular metal, four side members 24 extending between the
 20 upper frame 21 and the lower frame 22, an upper member 25 with cutouts 25a in three of the walls thereof, removable side panels 26 only one of which is shown and a removable door 27 which closes the front of the cabinet.

As can be seen in Figure 6, the side panel 26 has an upper horizontal flange 28 with a return vertical flange 29, the panel 26, 28, 29 enveloping the two side
 25 members 24 on that side of the frame of the cupboard.

Figure 7 shows the means whereby the U-shaped member 23 which extends horizontally can be mounted to the side member 24 which extends vertically. Two first holes 30 are punched or drilled in one wall 31 of the side member 24 and two first holes 32 are punched or drilled in one wall 33 of the U-shaped member 23.
 30 Operating through the first holes 30, 32, second holes 34 are then burst through the second wall 35 of the side members 24 and second holes 36 are burst through the




second wall 37 of the U-shaped member 23. Bursting the holes in this way forms collars 38 at the outsides of the holes 34 and collars 39 at the outside of the holes 36. The holes 36 are then screw threaded. When the members 23, 24 are pressed together the collars 38 on the side members 24 are a push fit into the first holes 32 in the U-shaped member 23 so that when bolts (not shown) are inserted along the aligned axis 40 of each of the holes 30, 34, 32, 36 to pull the members 23, 24 tightly into engagement with one another, the members 23, 24 are locked accurately at right angles one to the other without any play such that even a tall framework of U-shaped members 23 and side members 24, for example two metres tall, can stand rigidly without a tendency for the upper frame to move sideways or from to rear due to the connections being less than entirely rigid. The collars 38 can however have a tapering formation such that great precision is not required in the formation of the holes and collars.

Referring to Figures 8 to 12, the upper end of each side member 24 is provided with a formation similar to that shown in Figure 10 at the righthand side thereof, that is to say it has a groove 41 in the upper face 42 stepped back from a front upper corner 43. Actually the formation shown in Figure 10 is an extension piece to be hung on the upper or lower end of one of the side members 24 but the formation of the top end and bottom end of the side members 24 is the same as shown in Figure 10.

Referring to Figure 8, the side panel 26 shown has its horizontal upper flange 28 overlapping the upper surface 42 of the side member 24 and its vertical flange 29 engaged in the groove 41 of the upper end of the side member 24. At the lower end the side panel 26 has a horizontal flange 44 which, as shown in Figure 9, has, in alignment with each of the side members 24, apertures 45 and cutouts 46. At each side of the side member 24 both at the upper and at the lower end a hook 47 is provided. The hook 47 at the upper end has no function but that at the lower end engages in a respective one of the apertures 45. With reference again to Figure 8 the method of engagement is that the panel 26 is first hooked onto the upper end of the side member so that the vertical flange 29 engages in the groove 41. The bottom end of the panel 26 is then pushed inwardly to engage the hooks 47 in the cutouts 46, a

flared mouth of the cutouts 46 assisting this alignment. The side panel 26 is then raised slightly and pushed inwardly so that the hook 47 at the lower end of the side member 24 can engage in the respective aperture 45 in the bottom flange 44 of the side panel 26. The side panels 26 can thus quickly and easily be engaged with or
5 disengaged from the framework of the cabinet. It will be seen that the hooks 47 taper down towards their free ends such that the weight of the panel engages the edges of the apertures 45 both with the outer and with the inner faces of the hook 47 so that vibration will not cause rattling of the panel.

Referring now also to Figures 11 and 12, the extension pieces 48 have, in
10 addition to the groove 41, the top face 42, the front edge 43 and the hooks 47 previously described, a bent out tongue 49 and aligned apertures 50, 51 by means of which they can be hooked onto and bolted to the outer face of the upper and lower ends of the side members 24. The extension pieces 48 are preferably 100 mm between the front edge 43 and the upper edge of the face in which the tongue 49 is
15 provided whereby they can space the side panels 26 outwardly from the side members 24 by 100 mm to give an additional space for extra wiring or other purposes. A blanking plate can extend between the door of the cabinet and the extended position of the side panels 26 to fill 100 mm space at the front. If two adjacent cabinets are each provided with extension pieces 48 on their adjacent sides then the two cabinets
20 can be accurately spaced apart by 200 mm to form a wiring space therebetween, a suitable blanking plate being provided to cover the space to the front.

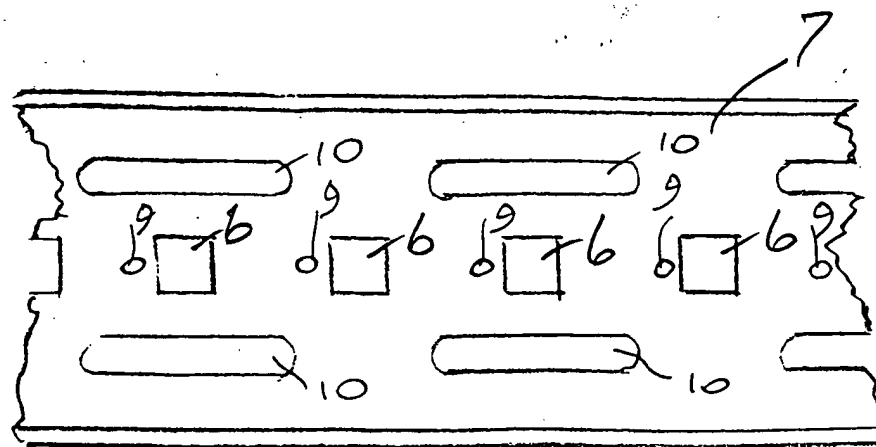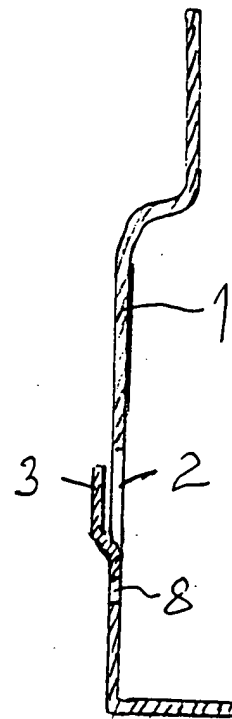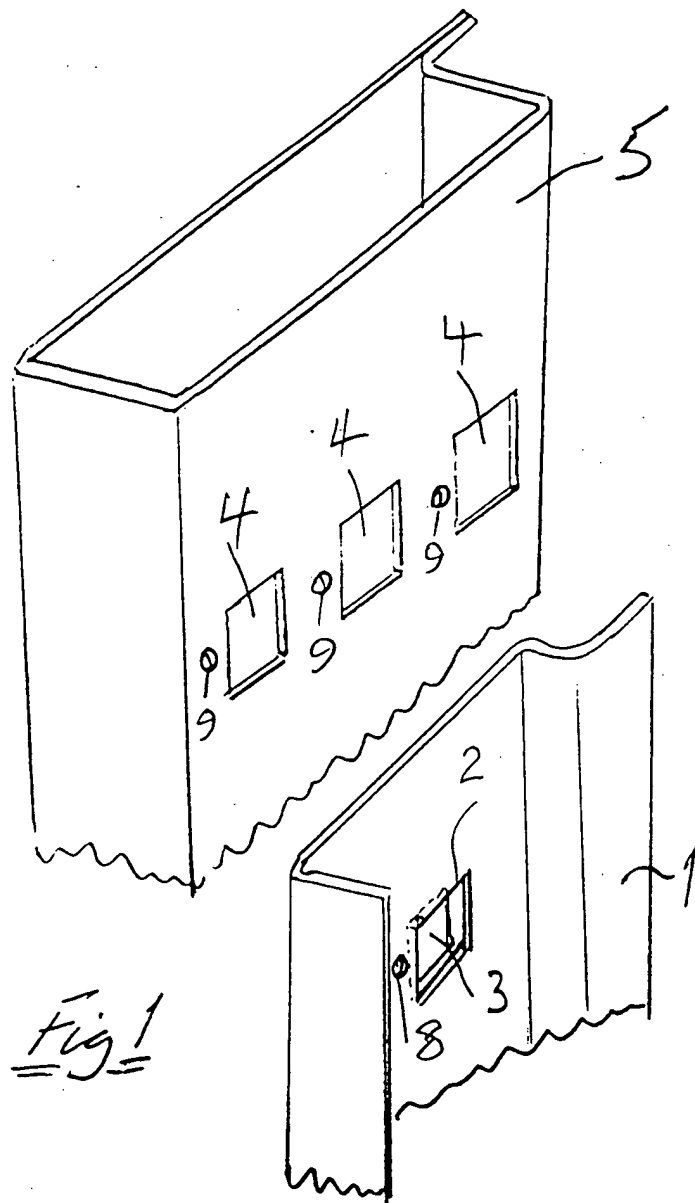

2/7

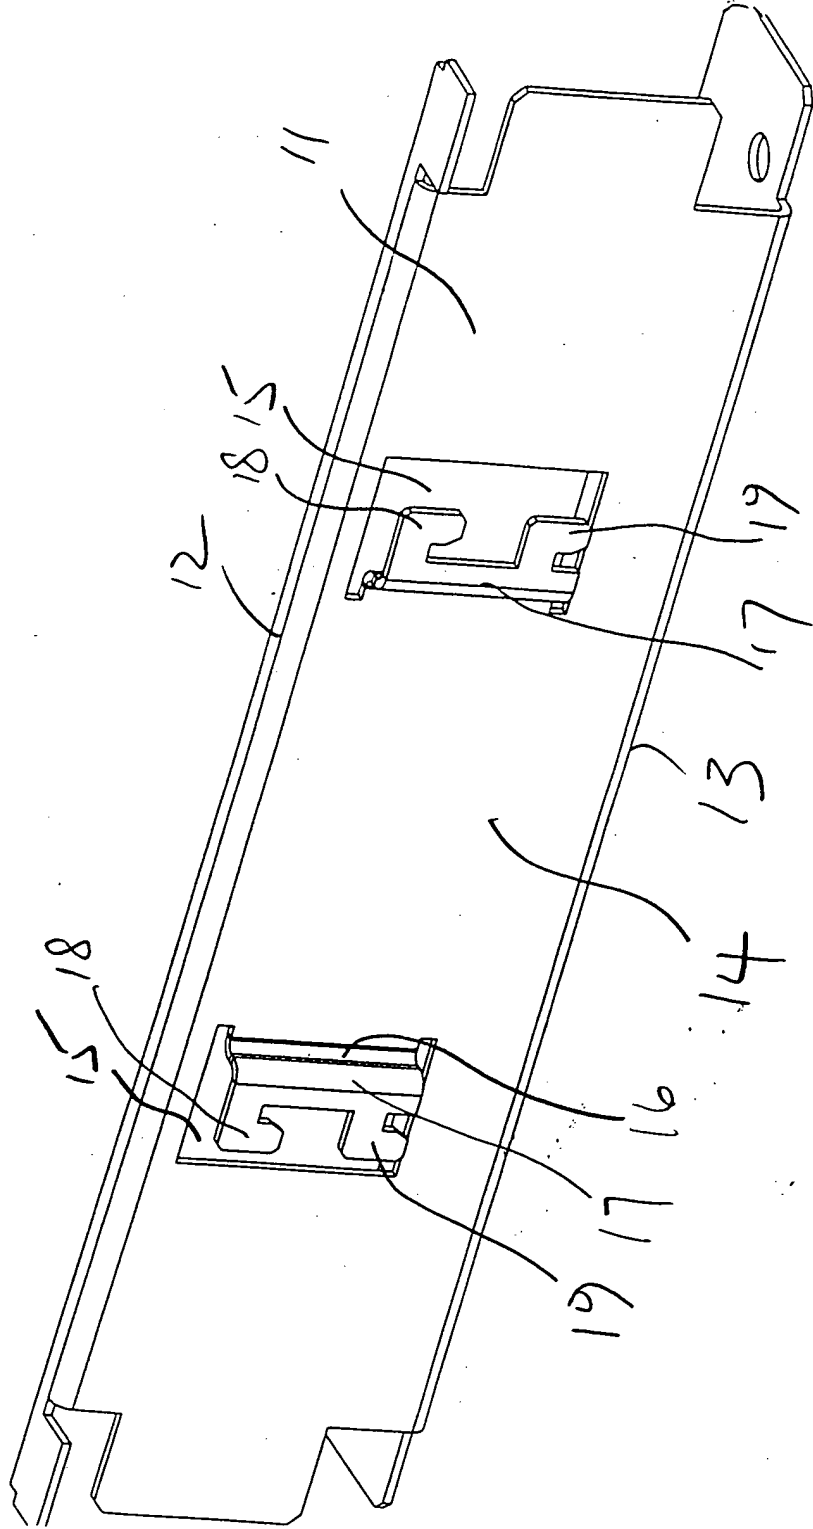
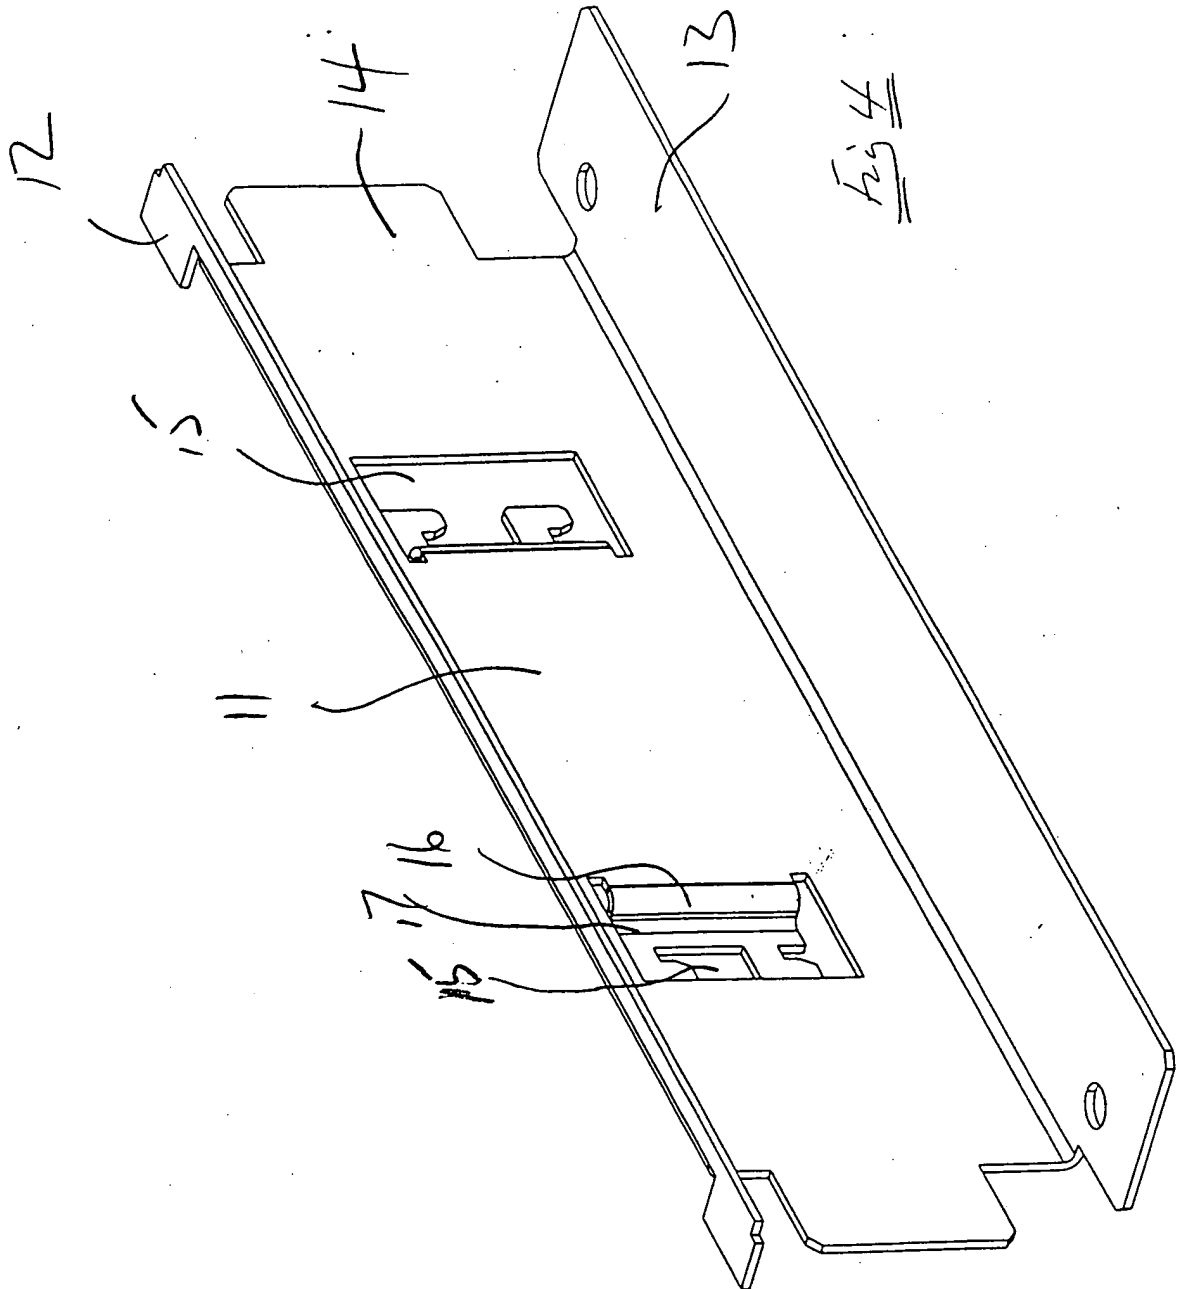


Fig 3

3/7



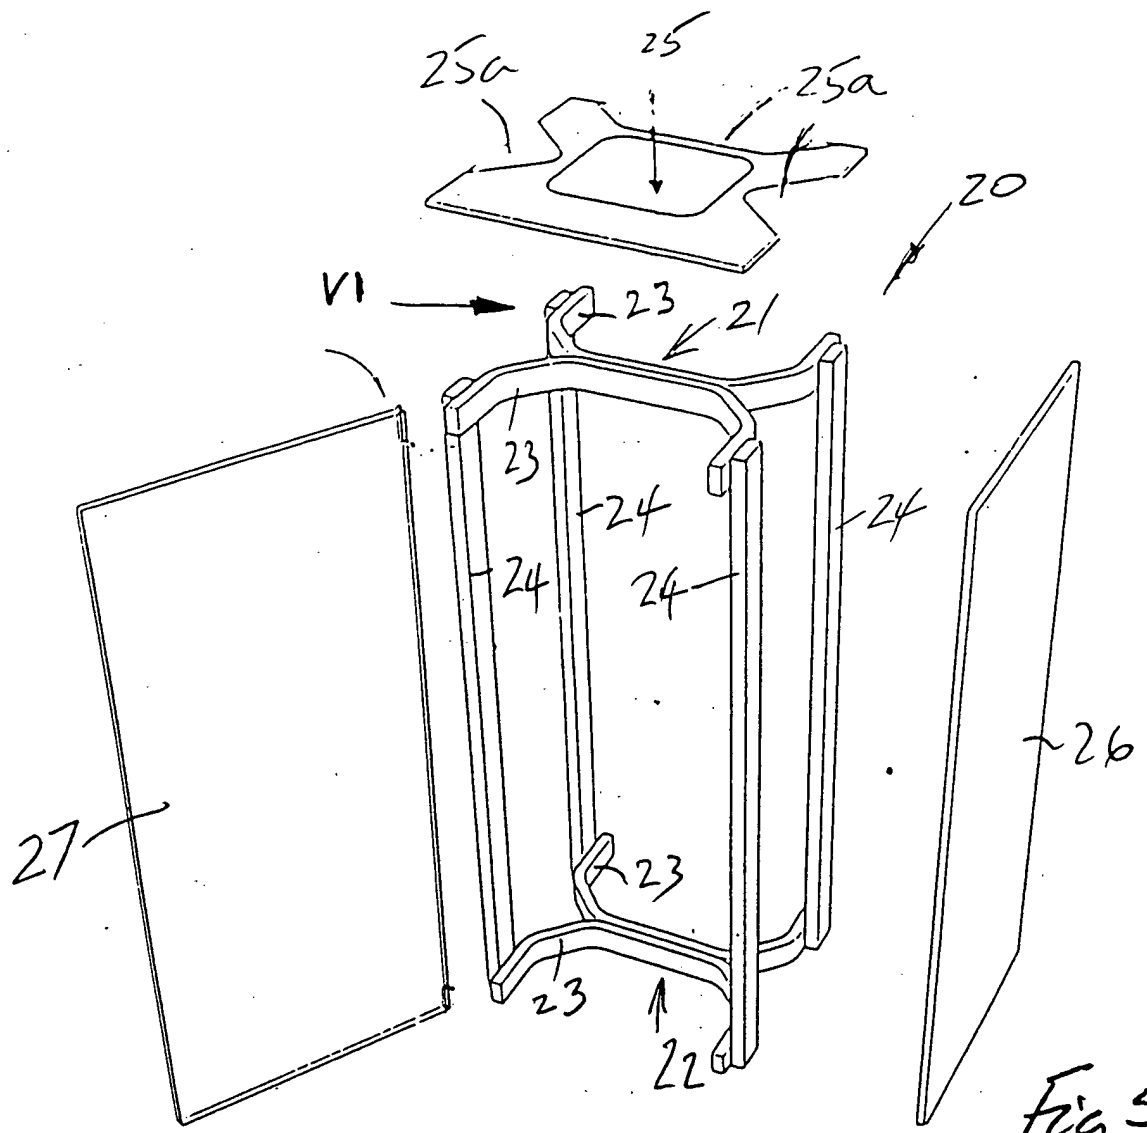


Fig 5

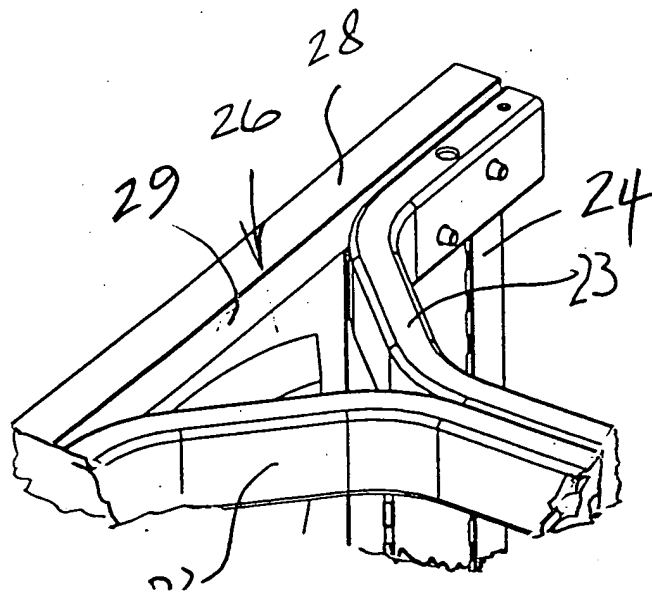


Fig 6

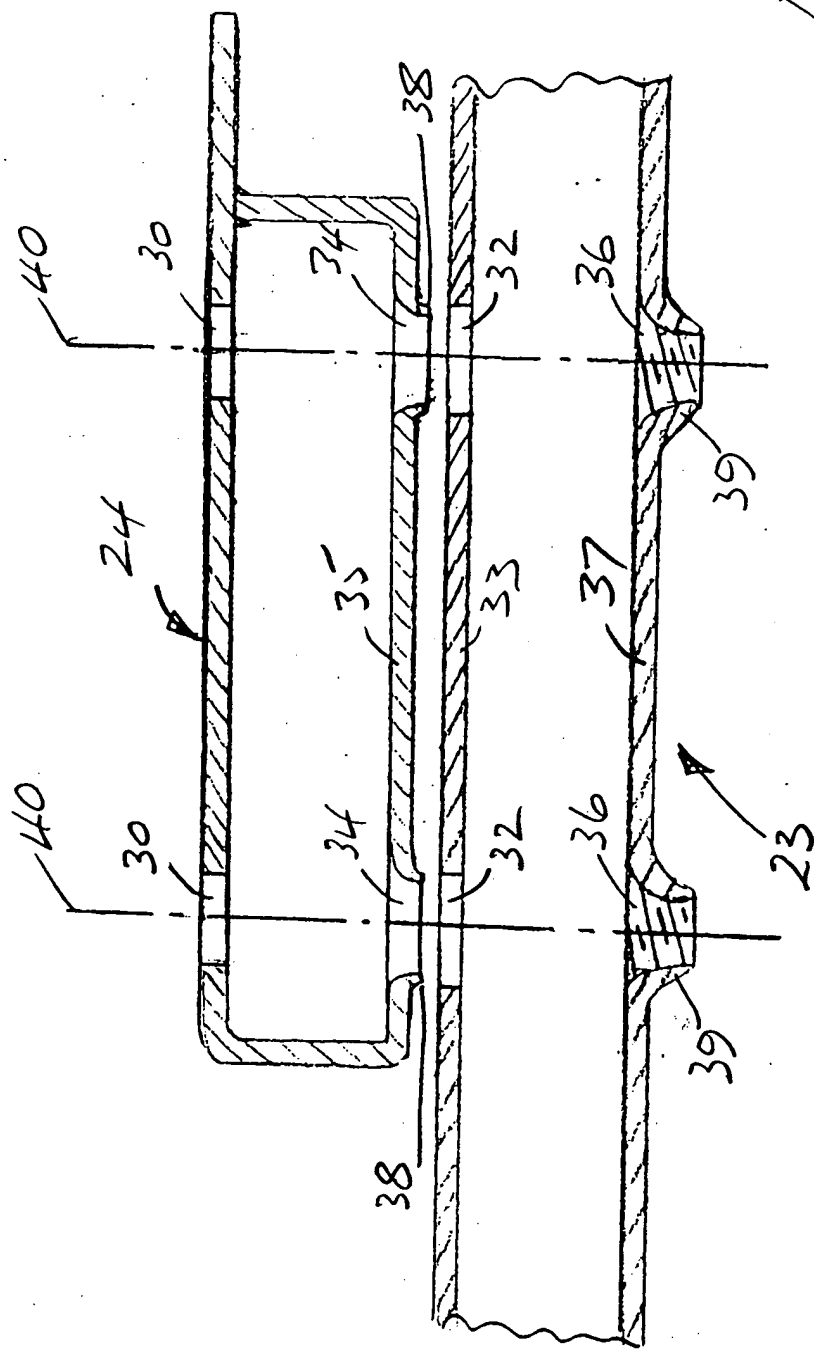


Fig 7

6/7

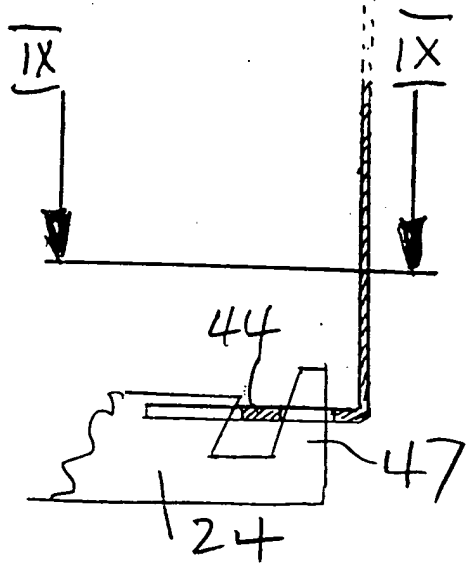
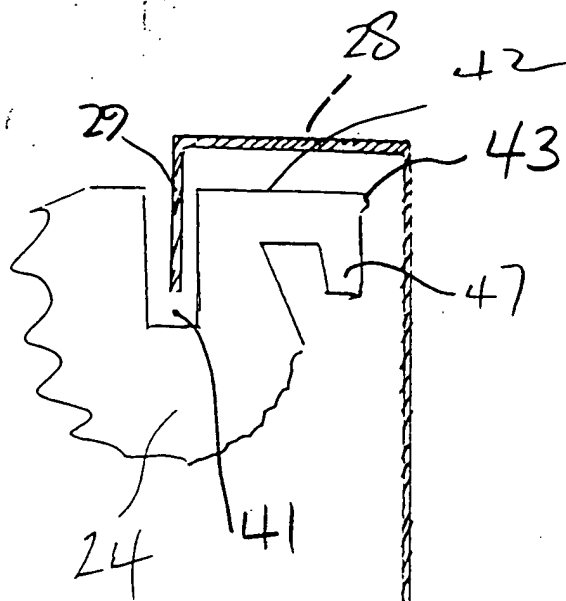


Fig 8

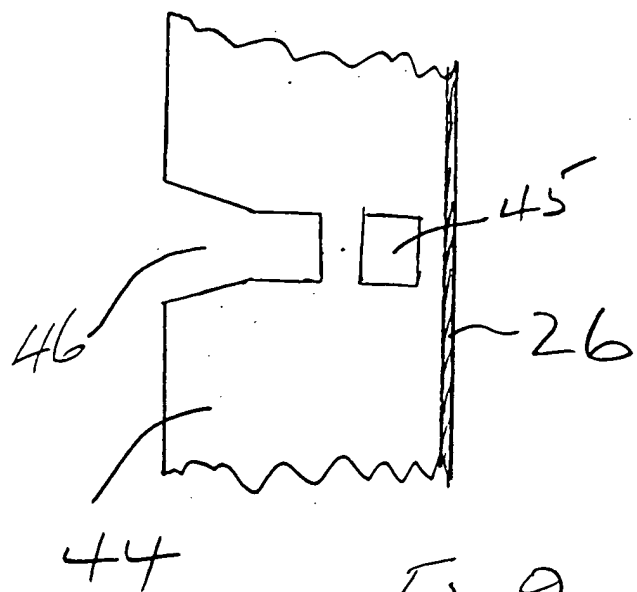


Fig 9

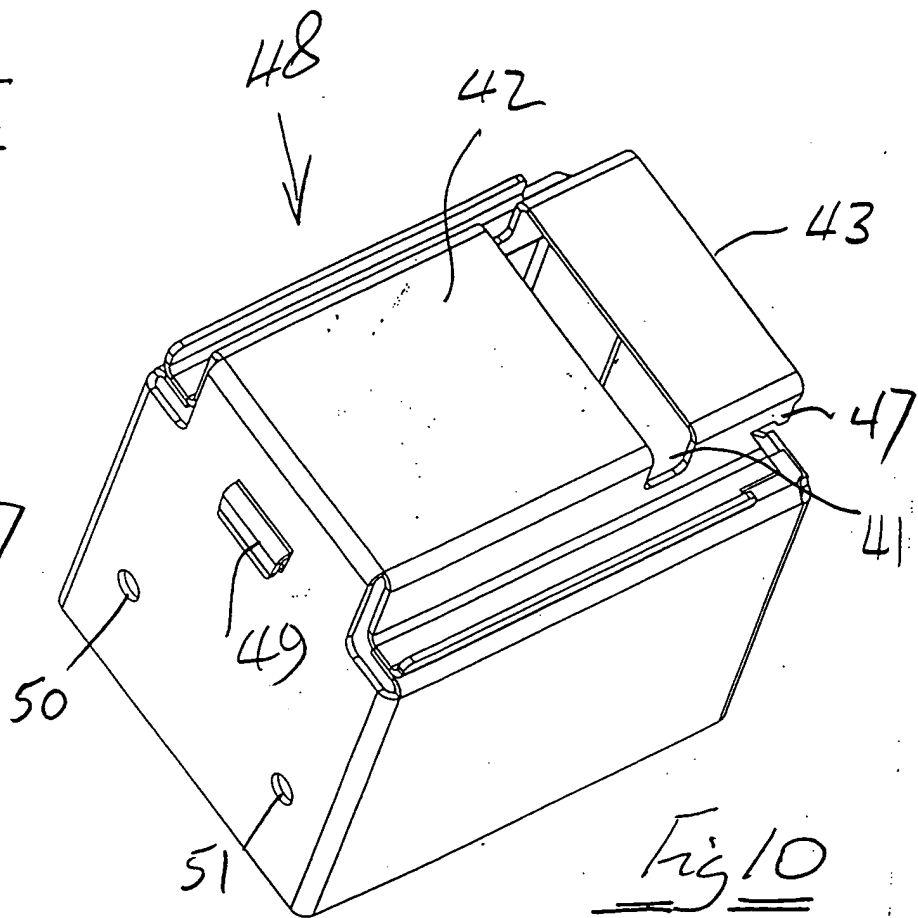


Fig 10

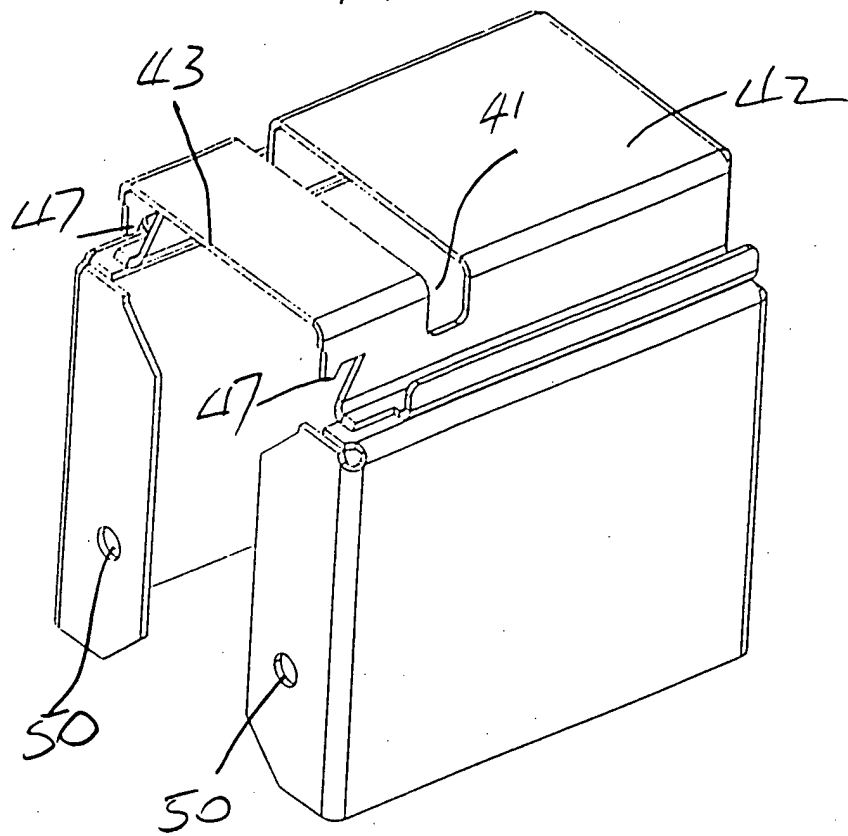


Fig 11

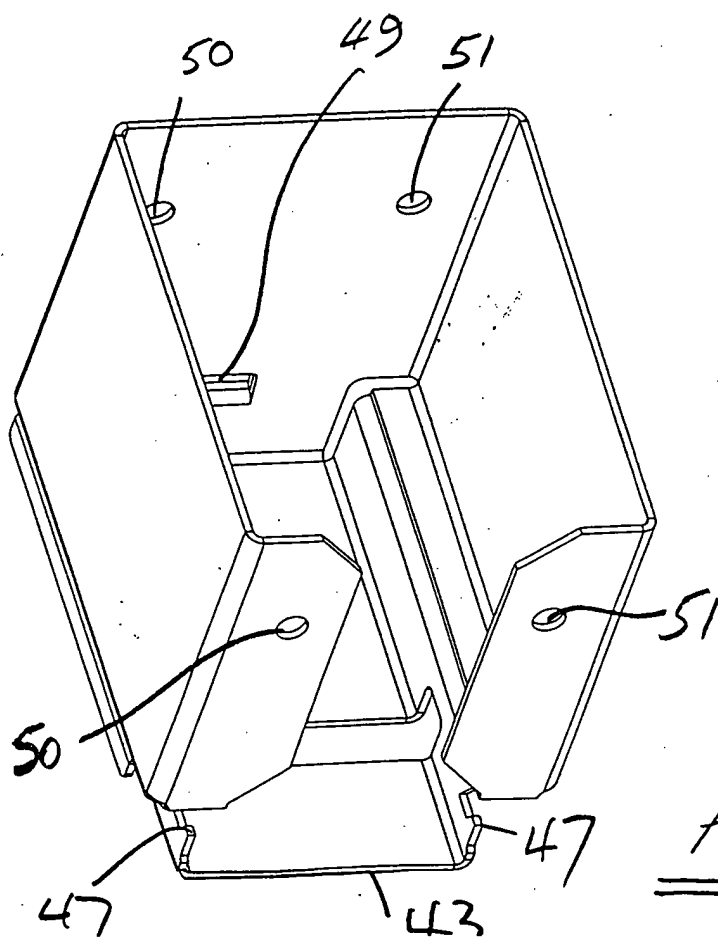


Fig 12